









AS-Interface Dynamic Application

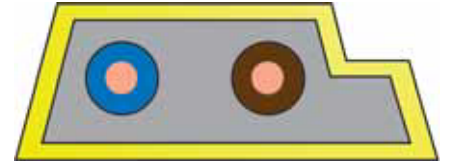

TECHNICAL DATA

 Conductor	Flexible
 Insulation	Thermoplastic
 Colour code	Blue - Brown
 Jacket	EPDM or polyurethane
 Service temperature	Rating: -20 +80 °C Storage: -40 +80 °C
 D.C. resistance	13,7 Ohm/km
 Insulation resistance	20 MOhm. km

NORMATIVE REFERENCE



Oil resistance
VDE 0472 part 803 A/B (04/1986)
UL 1581 - VDE 0282 Teil 10
HD 22.10 S1



Max pulling strength
50N/mm²

COMPOSITION	CODE	DIAM. NOM. mm	KG/ KM	
			CU	KG/KM
Pur	2x1,5mm² Yellow	11DRP15X 02P-G1	10x4mm	57
Pur	2x1,5mm² Black	11DRP15X 02P-N1	10x4mm	57
EPDM	2x1,5mm² Yellow	11DRP15X 02G-G1	10x4mm	57
EPDM	2x1,5mm² Black	11DRP15X 02G-N1	10x4mm	57